



# Roll-A-Door®

MINI WAREHOUSE –  
LIGHT INDUSTRIAL DOOR (R1M)



## CURTAIN



0.4mm continuous pressed square-line steel curtain.

SIZE	MINIMUM DOOR SIZE	MAXIMUM DOOR SIZE
HEIGHT	1250mm	3000mm
WIDTH	940mm	3150mm

## BOTTOM RAIL

Aluminium bottom rail with weatherseal.  
Taper: Optional. To maximum 3150mm (w). Minimum taper ratio is 1:150. Maximum taper ratio is 1:10, with maximum total taper 290mm.

## GUIDES

Supplied with 25mm galvanised guides.  
Rubber coated guide stops.  
Guide blocks with double rollers for smooth, quiet operation.  
Windlocking: Optional.

## DRUM

Castalated steel drum and mini groove top sheet reduces paint scuffing and promotes ease of operation.

## SPRINGS

Spring life designed for 20,000 cycles.

## OPERATION

Nylofelt® minimises friction, ensures continuous smooth, quiet operation for a minimum of 20,000 cycles.

Doors can be operated manually.

Sturdy metal D shaped lifting handle, with pull rope fitted for manual operation.

## BRACKETS

Galvanised steel.

## LOCKING

Selection of locking systems, including:

- easy lift
- waist height mounted locks
- overlock capabilities
- stainless steel lock.


## FINISHES

Extensive range of standard Colorbond® colours, Zinalume® and several special self storage complex special colours.


## OPTIONS

Ventilation: Optional. Slotted.  
Mullions: Optional  
Personnel access: No.  
Head infill panels: Optional  
Head seal kit: Optional (Ember Seal).

## CLEARANCES

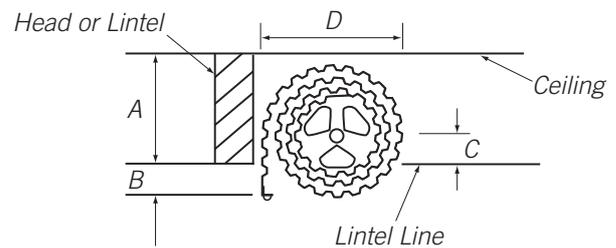

Door Roll Obtrusion

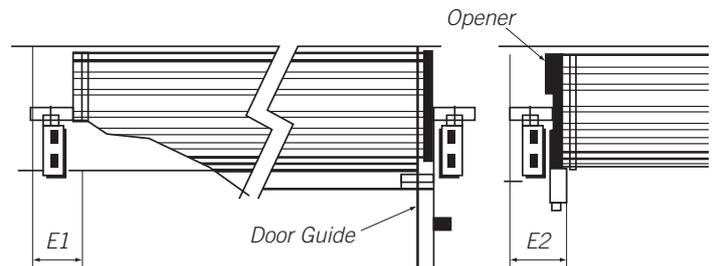

(Drawings not to scale)

## DIMENSIONS

HEIGHTS	INSTALLATION CLEARANCES								
	HEADROOM (mm)				SIDEROOM (mm)				
	RECOMMENDED		RESTRICTED		E1	E2			
	A	B	C	D	A	C	LH	RH	
Series 1 Up to 2200	350	80	120	460	315	85	100	140	155
2201-3000	370	80	120	480	335	100			

\*All measurements are in mm.

Call **13 62 63** or visit [www.bnd.com.au](http://www.bnd.com.au) for further information.

B&D Doors is a division of B&D Australia Pty Ltd ABN 25 010 473 971 ©2017 B&D Australia



Information relating to product measurements, colours and specifications is accurate at the time of print and is subject to slight variations resulting from the manufacturing process. B&D reserves the right to change product specifications at any time. Installation measurements are approximate and may vary depending on application and other factors, including the opening and structure. Take care when handling and storing slats. Damage to the slats can affect door performance.

Installation should only be performed by a professional garage door installer. Installers should refer to the instruction manual for this product prior to commencing installation. The instruction manual contains important safety and other information that must be followed when installing the product.